

Designed with flexibility and productivity in mind

- Compact, modular and easy to transport
- Maximum material flexibility of the possible materials (including steel, stainless steel, aluminum, copper)

Key Features

- High integration of the laser source into the FANUC® robot controller
- Impulse drive to relieve the strain on employees
- IPG® LightWeld laser system for welding and cleaning (3 variants of laser welding machines)
- Laser safety housing for category 4 lasers in accordance with DIN EN 60825-4
- Welding process with and without filler wire
- FlexLayout enables automated and manual welding and cleaning processes
- Complete system structure on one platform
- Optional additional rotary axes for synchronized robot movements and optimum welding results for even more flexibility



Easy transportation and installation (Plug & Play)



Reproducible weld seam quality





CONFIGURATION

ROBOT

FANUC® AM 100iD (R1,636 mm/PL10kg)

LASER EQUIPMENT

IPG® Laser-System LightWELD 1000 incl. Cobot Kit, hose package 5 m (standard)

Single-Mode / Functions: Welding / Power: 1,000 W / Materials: Steel, Aluminium / Filler wire: Yes

PLATFORM AND ENCLOSURE

Platform, accessories and installation material, safety fence (laserclass 4), incl. light barrier and external start, Euchner® CEM service door interlock

POSITIONER - TURNTABLE

Turntable iD-125 (ImpulseDrive) BasePlate (Site A/B)

CONTROLS

Cabinet for saftey-components and I/O-Hardware (H×W 800×600mm), program sequence and safety via robot control, external start button

COMMISSIONING

Commissioning and functional test before delivery

OPTIONS

LASER EQUIPMENT

 IPG® Laser-System LightWELD 1500 XC incl. Cobot Kit, hose package 5 m (standard)

Multi-Mode/Functions: Welding & Cleaning/

Power: 1,500 W / Materials: Steel, Aluminium / Filler wire: Yes

 IPG® Laser-System LightWELD 1500 XR incl. Cobot Kit, hose package 5 m (standard)

Multi-Mode / Functions: Welding & Cleaning /

Power: 1,500 W / Materials: Steel, Aluminium, Copper,

Titanium, Nickel Alloy / Filler wire: Yes

Additional Options:

- Wire feeder incl. adapter
- Monitoring laser cell (1× videocam, 1× monitor 21")

ARC-WELDING SENSORS

- Servo-Robot Fuji-Cam 2.0

TURNTABLE

iD2V-100H/V (2×ext. Robot-Axis)

CONTROLS

Options Cabinet I:

- 16 digital Inputs for sensor detection
- Remote-diagnostics VPN Router (Mbconnect816-Router)

OPERATOR AREA


- Workplace lighting on the operator side
- Compressed air connection via quick release coupling at the operator's side


CompactLine

LCM iD-125 LASER


Dual Station Turntable

Configuration Type: FANUC®/IPG®

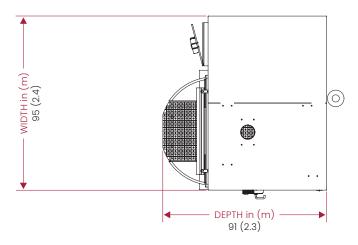



AVAILABLE FIXTURE MOUNTINGS



COMPREHENSIVE PROJECT MANAGEMENT

We not only offer cell solutions, but also comprehensive project management through to turnkey solutions. If required, we can provide you with training, process support, clamping fixtures and tooling.

DIMENSION

Footprint (D/W/H) in (m)	Working Tool Envelope in (m)	Number of Work Zones	Weight Capacity per Side - depending on the type of fixture - Ibs (kg)
91 (2.3) D / 95 (2.4) W / 114 (2.9) H	32 (0.8) × 20 (0.5)	2	Type 1: 276 (125) Type 2/3: 221 (100)

Please note: Subject to technical changes.

